


5-1-2011

# Double Acceptance Sampling Plans Based on Truncated Life Tests for Marshall-Olkin Extended Lomax Distribution

G. Srinivasa Rao

Dill University, gaddesrao@yahoo.com

Follow this and additional works at: <http://digitalcommons.wayne.edu/jmasm>

 Part of the [Applied Statistics Commons](#), [Social and Behavioral Sciences Commons](#), and the [Statistical Theory Commons](#)

## Recommended Citation

Rao, G. Srinivasa (2011) "Double Acceptance Sampling Plans Based on Truncated Life Tests for Marshall-Olkin Extended Lomax Distribution," *Journal of Modern Applied Statistical Methods*: Vol. 10 : Iss. 1 , Article 12.

DOI: 10.22237/jmasm/1304223060

Available at: <http://digitalcommons.wayne.edu/jmasm/vol10/iss1/12>

This Regular Article is brought to you for free and open access by the Open Access Journals at DigitalCommons@WayneState. It has been accepted for inclusion in Journal of Modern Applied Statistical Methods by an authorized editor of DigitalCommons@WayneState.

## Double Acceptance Sampling Plans Based on Truncated Life Tests for Marshall-Olkin Extended Lomax Distribution

G. Srinivasa Rao  
Dilla University,  
Dilla, Ethiopia

---

Double Acceptance Sampling Plans (DASP) is developed for a truncated life test when the lifetime of an item follows the Marshall-Olkin extended Lomax distribution. Probability of Acceptance (PA) is calculated for different consumer's confidence levels fixing the producer's risk at 0.05. Probability of acceptance and producer's risk are illustrated with examples.

Key words: Marshall-Olkin extended Lomax distribution, double acceptance sampling plan, probability of acceptance, consumer's risk, producer's risk, truncated life test.

---

### Introduction

The main goal of competitive enterprises in a global business market is how to maintain and improve the quality of their products. A high quality product has the high probability of acceptance. Two important tools for ensuring quality are statistical quality control and acceptance sampling (AS). Acceptance sampling plans are concerned with accepting or rejecting a submitted large sized lot of products on the basis of the quality of the products inspected in a small sample taken from the lot.

A single acceptance sampling plan (SASP) is a specified plan that establishes the minimum sample size to be used for testing. In most acceptance sampling plans for a truncated life test, the major issue is to determine the sample size from a lot under consideration. It is implicitly assumed in the usual sampling plan that only a single item is put in a tester. On the basis of information obtained from this first sample a lot is either accepted or rejected. If a

good lot is rejected on the basis of this information, its probability is called the type-1 error (producer's risk) and it is denoted by  $\alpha$ . The probability of accepting a bad lot is known as the type-2 error (consumer's risk) and it is denoted as  $\beta$ . If the product is electronic components or has failure mechanisms a random sample of the lot is tested and the entire lot is accepted if no more than  $c$  (acceptance sampling number) failures occur during the experiment time. Recently, Aslam (2007) proposed the double acceptance sampling plan based on a truncated life test when the lifetime of an item follows the Rayleigh distribution.

Single acceptance sampling plans based on truncated life tests for a variety of distributions are discussed by Epstein (1954), Sobel and Tischendorf (1959), Goode and Kao (1961), Gupta and Groll (1961), Gupta (1962), Kantam and Rosaiah (1998), Kantam, et al. (2001), Baklizi (2003), Baklizi and El Masri (2004), Rosaiah and Kantam (2005), Rosaiah, et al. (2006, 2007, 2007), Tsai and Wu (2006), Balakrishnan, et al. (2007), Aslam and Kantam (2008) and Rao, et al. (2008, 2009).

This article proposes a double acceptance sampling plan (DASP) based on truncated life tests when the lifetime of a product follows the Marshall-Olkin extended Lomax distribution with known shape parameter as introduced by Ghitany, et al. (2007) and to determine the probability of acceptance (PA).

---

G. Srinivasa Rao is a Professor of Statistics in the Department of Statistics, School of Mathematical & Computer Sciences, Dilla University, Dilla, P. O. Box: 419, Ethiopia. His research interests include statistical inference, quality control and reliability estimation Email him at: gaddesrao@yahoo.com.

The probability density function (pdf) and cumulative distribution function (cdf) of the Marshall-Olkin extended Lomax distribution are given by

$$g(t; \nu, \sigma, \theta) = \frac{\nu \theta (1+t/\sigma)^{\theta-1}}{\left[ (1+t/\sigma)^{\theta} - \bar{\nu} \right]^2},$$

$$t > 0, \nu, \sigma, \theta > 0, \bar{\nu} = 1 - \nu \quad (1.1)$$

and

$$G_T(t; \nu, \sigma, \theta) = \frac{(1+t/\sigma)^{\theta} - 1}{\left[ (1+t/\sigma)^{\theta} - \bar{\nu} \right]},$$

$$t > 0, \nu, \sigma, \theta > 0, \bar{\nu} = 1 - \nu \quad (1.2)$$

respectively, where  $\sigma$  is a scale parameter,  $\theta$  is a shape parameter and  $\nu$  is an index parameter. The mean of this distribution is given by  $\mu = 1.570796 \sigma$  when  $\nu = 2, \theta = 2$ . Rao, et al. (2008, 2009) studied single acceptance sampling plans based on the Marshall-Olkin extended Lomax distribution.

The Double Acceptance Sampling Plan (DASP) for Life Tests

DASP is used to minimize the producer's risk because it provides another opportunity for acceptance of the product. In DASP a sample of size  $n_1$  items is taken from a lot which is called the sample first; this sample first is then put on tests. Let  $c_1$  and  $c_2$  be the acceptance number for sample first and the sample second respectively. The experiment is terminated if no more than  $c_1$  failures occur during the experiment time ( $t_0$ ), i.e., the lot is accepted or rejected on the basis of sample first if more than  $c_2$  failures occur or if time of experiment ends (whichever is earlier). If  $(c_1 + 1)^{\text{th}}$  failures occur in sample first, then all possibilities for sample second are given as shown in Table 1.

Table 1: Possibilities for Sample Second Failure Based on Sample First Failure

Sample First	Sample Second
$(c_1 + 1)^{\text{th}}$ failures occur in sample 1	less than $(c_2 - 1)^{\text{th}}$ must be occurred in this sample 2 for acceptance
$(c_1 + 2)^{\text{th}}$ failures occur in sample 1	less than $(c_2 - 2)^{\text{th}}$ must be occurred in this sample 2 for acceptance
$(c_1 + n)^{\text{th}}$ failures occur in sample 1	less than $(c_2 - n)^{\text{th}}$ must be occurred in this sample for acceptance

Let  $\mu$  represent the true average life of a product and  $\mu_0$  denote the specified life of an item, under the assumption that the lifetime of an item follows the Marshall-Olkin extended Lomax distribution. A product is considered good and accepted for consumer use if the sample information supports the hypothesis  $H_0 : \mu \geq \mu_0$ ; if the sample does not support this hypothesis, the lot of product is rejected. In acceptance sampling schemes, this hypothesis is tested based on the number of failures from a sample in a pre-fixed time: If the number of failures exceeds the action limit  $c$  the lot is rejected. The lot will be only be accepted if there is enough evidence that  $\mu \geq \mu_0$  at a certain level of consumer risk, otherwise the lot will be rejected.

When determining the parameters of a proposed sampling plan the consumer's risk is used, and often, the consumer's risk is expressed by the consumer's confidence level. If the confidence level is  $p^*$ , then the consumer's risk will be  $\beta = 1 - p^*$ . In this study the consumer's risk was fixed not to exceed  $1 - p^*$  and it satisfied the inequality:

$$\sum_{i=0}^c \binom{n}{i} p^i (1-p)^{n-i} \leq 1 - p^* \quad (2.1)$$

where  $p$  is the probability that an item fails before the termination time.

Consider a life testing experiment having the measurements: number of items from sample first put on test ( $n_1$ ), acceptance number for sample first ( $c_1 = 0$ ), number of items from sample second put on test ( $n_2$ ) and accept the lots if no more than two failures occur in sample second ( $c_2 = 2$ ).

In this life experiment if no failure occurs when sample first of  $n_1$  items is put on test the lot is accepted. If the true - but unknown - life of the product deviates from the specified life of the product it should result in a considerable change in the probability of acceptance of the lot based on the sampling plan. Hence, the probability of acceptance (PA) can be regarded as a function of the deviation of a specified average from the true average. This function is called the operating characteristic (OC) function of the sampling plan. The PA for sample first using the Marshall-Olkin extended Lomax distribution with  $\nu = 2, \theta = 2$  is shown in Table 2. The probability of acceptance for  $L(p_1)$

and  $L(p_2)$  for the sampling plan  $(n_1, c_1, \frac{t}{\sigma_0})$

and  $(n_2, c_2, \frac{t}{\sigma_0})$  is calculated using equations

$$L(p_1) = \sum_{i=0}^{c_1=0} \binom{n_1}{i} p^i (1-p)^{n_1-i} \quad (2.2)$$

and

$$L(p_2) = \sum_{i=0}^{c_2=2} \binom{n_2}{i} p^i (1-p)^{n_2-i} \quad (2.3)$$

respectively, where

$$p = G_T(t; \sigma) = G_T\left(\frac{t}{\sigma_0} \frac{\sigma_0}{\sigma}\right),$$

is given in (1.2).

The probability of acceptance for DASP can be obtained by using (2.2) and (2.3) as:

$$\begin{aligned} P(A) &= P(\text{no failures occur in sample 1}) \\ &+ P(1 \text{ failure occurs in samples 1 and 0,} \\ &\quad \text{and 1 failure occurs in sample 2}) \\ &+ P(2 \text{ failures occur in sample 1,} \\ &\quad \text{and 0 failures occur in sample 2}). \end{aligned}$$

The values of probability of acceptance for DASP are determined at  $p^* = 0.75, 0.90, 0.95, 0.99$  and  $t/\sigma_0 = 0.628, 0.942, 1.257, 1.571, 2.356, 3.142, 3.927, 4.712$  with  $\nu = 2, \theta = 2$  and are shown in Table 3. It is important to note that in sample first and sample second, p is function of the cdf of the Marshall-Olkin extended Lomax distribution. These choices are consistent with Gupta and Groll (1961), Gupta (1962), Kantam, et al. (2001), Baklizi and EI Masri (2004), Balakrishnan, et al. (2007) and Rao, et al. (2008).

### Results

Suppose that the lifetime of a product follows the Marshall-Olkin extended Lomax distribution with  $\nu = 2, \theta = 2$  and an experimenter wants to establish that the true unknown mean life is at least 1,000 hours with confidence 0.75. The acceptance numbers for this experiment would be  $c_1 = 0$  and  $c_2 = 2$  with sample sizes  $n_1 = 6$  and  $n_2 = 8$ . The lot will be accepted if no failure is observed in a sample of 6 during 628 hours. The probability of acceptance for this single sampling from Table 2 is 0.1558. The PA for the same measurements using double acceptance sampling from Table 3 is 0.29276. In the DASP scheme as  $\sigma / \sigma_0$  increases PA also increases.

For the above sampling plan, PA is 0.97289 when the ratio of unknown average life to specified average life is 12. As the time of experiment increases, the probability of acceptance for the double acceptance sampling plan decreases. From Table 3, it is clear that when the time of experiment is 4,712 hours, the PA for ratio  $\sigma / \sigma_0 = 2$  is 0.04906. For this same experiment time, as  $\sigma / \sigma_0$  increases, PA also increases. It is important to note that the double acceptance sampling scheme minimizes the

Table 2: Operating Characteristics Values for Sample First for the Sampling Plan  $(n_1, c_1, \frac{t}{\sigma_0})$

when  $c_1 = 0$  Marshall-Olkin Extended Lomax Distribution with  $\nu = 2, \theta = 2$

$p^*$	$n_1$	$t / \sigma_0$	$\sigma / \sigma_0$					
			2	4	6	8	10	12
0.75	6	0.628	0.15576	0.39119	0.53422	0.62466	0.68622	0.73062
	4	0.942	0.15968	0.39271	0.53488	0.62500	0.68641	0.73074
	4	1.257	0.08995	0.28921	0.43485	0.53462	0.60556	0.65817
	3	1.571	0.10891	0.31489	0.45928	0.55663	0.62527	0.67589
	3	2.356	0.04222	0.18266	0.31496	0.41760	0.49594	0.55670
	2	3.142	0.06907	0.22806	0.36256	0.46285	0.53784	0.59527
	2	3.927	0.04180	0.16475	0.28637	0.38514	0.46289	0.52449
	2	4.712	0.02660	0.12125	0.22812	0.32193	0.39946	0.46292
0.90	8	0.628	0.08381	0.28610	0.43348	0.53398	0.60527	0.65804
	6	0.942	0.06381	0.24610	0.39119	0.49411	0.56869	0.62466
	5	1.257	0.04926	0.21209	0.35312	0.45715	0.53420	0.59282
	4	1.571	0.05201	0.21423	0.35435	0.45789	0.53467	0.59315
	3	2.356	0.04222	0.18266	0.31496	0.41760	0.49594	0.55670
	3	3.142	0.01815	0.10891	0.21831	0.31489	0.39444	0.45928
	3	3.927	0.00855	0.06687	0.15325	0.23902	0.31493	0.37985
	3	4.712	0.00434	0.04222	0.10896	0.18266	0.25247	0.31496
0.95	9	0.628	0.06147	0.24467	0.39047	0.49371	0.56845	0.62451
	7	0.942	0.04034	0.19482	0.33455	0.43933	0.51763	0.57755
	5	1.257	0.04926	0.21209	0.35312	0.45715	0.53420	0.59282
	5	1.571	0.02484	0.14575	0.27339	0.37666	0.45720	0.52054
	4	2.356	0.01470	0.10364	0.21430	0.31214	0.39256	0.45796
	3	3.142	0.01815	0.10891	0.21831	0.31489	0.39444	0.45928
	3	3.927	0.00855	0.06687	0.15325	0.23902	0.31493	0.37985
	3	4.712	0.00434	0.04222	0.10896	0.18266	0.25247	0.31496
0.99	12	0.628	0.02426	0.15303	0.28540	0.39020	0.47089	0.53381
	9	0.942	0.01612	0.12208	0.24467	0.34732	0.42886	0.49371
	7	1.257	0.01477	0.11406	0.23286	0.33426	0.41570	0.48094
	6	1.571	0.01186	0.09916	0.21093	0.30984	0.39096	0.45682
	5	2.356	0.00512	0.05880	0.14580	0.23331	0.31072	0.37673
	4	3.142	0.00477	0.05201	0.13145	0.21423	0.28927	0.35435
	4	3.927	0.00175	0.02714	0.08201	0.14833	0.21427	0.27509
	4	4.712	0.00071	0.01470	0.05204	0.10364	0.15957	0.21430

DASP FOR MARSHALL-OLKIN EXTENDED LOMAX DISTRIBUTED LIFE TESTS

Table 3: Operating Characteristics Values for the Double Sampling Plan  $(n_2, c_2, \frac{t}{\sigma_0})$

when  $c_1 = 0$  and  $c_2 = 2$  Marshall-Olkin Extended Lomax Distribution with  $\nu = 2, \theta = 2$

$p^*$	$n_1$	$n_2$	$t / \sigma_0$	$\sigma / \sigma_0$					
				2	4	6	8	10	12
0.75	6	8	0.628	0.29276	0.50105	0.86425	0.92779	0.95741	0.97289
	4	6	0.942	0.28692	0.49834	0.85658	0.92304	0.95436	0.97084
	4	5	1.257	0.18319	0.38854	0.79087	0.88279	0.92856	0.95349
	3	5	1.571	0.17606	0.39214	0.76899	0.86779	0.91832	0.94632
	3	4	2.356	0.07833	0.24442	0.63350	0.77292	0.85228	0.89938
	2	4	3.142	0.09425	0.27216	0.61281	0.75306	0.83604	0.88665
	2	3	3.927	0.08244	0.22838	0.59443	0.73854	0.82510	0.87845
	2	3	4.712	0.04906	0.16496	0.49061	0.65090	0.75619	0.82513
0.90	8	10	0.628	0.14865	0.36654	0.76759	0.86826	0.91912	0.94708
	6	8	0.942	0.10420	0.31013	0.70705	0.82753	0.89150	0.92779
	5	6	1.257	0.09101	0.28114	0.68727	0.81386	0.88208	0.92116
	4	6	1.571	0.07686	0.26266	0.63949	0.77821	0.85639	0.90249
	3	5	2.356	0.05706	0.21770	0.56209	0.71656	0.81006	0.86785
	3	4	3.142	0.02910	0.14104	0.46313	0.63339	0.74510	0.81789
	3	4	3.927	0.01211	0.08352	0.32825	0.50281	0.63346	0.72651
	3	4	4.712	0.00560	0.05094	0.22930	0.39104	0.52766	0.63350
0.95	9	12	0.628	0.09469	0.30286	0.69561	0.81978	0.88620	0.92407
	7	9	0.942	0.06148	0.24378	0.62870	0.77176	0.85233	0.89979
	5	7	1.257	0.07461	0.26273	0.64649	0.78411	0.86090	0.90588
	5	6	1.571	0.04055	0.18977	0.56103	0.71960	0.81391	0.87145
	4	5	2.356	0.02212	0.13247	0.45228	0.62671	0.74100	0.81528
	3	5	3.142	0.02157	0.12425	0.38835	0.56197	0.68478	0.76899
	3	4	3.927	0.01211	0.08352	0.32825	0.50281	0.63346	0.72651
	3	4	4.712	0.00560	0.05094	0.22930	0.39104	0.52766	0.63350
0.99	12	16	0.628	0.03081	0.18223	0.52412	0.69017	0.79171	0.85476
	9	11	0.942	0.02141	0.15000	0.48085	0.65448	0.76426	0.83390
	7	9	1.257	0.01890	0.13770	0.45168	0.62824	0.74308	0.81729
	6	8	1.571	0.01449	0.11744	0.40429	0.58423	0.70674	0.78834
	5	6	2.356	0.00648	0.07208	0.30745	0.48783	0.62337	0.71970
	4	6	3.142	0.00516	0.05738	0.23006	0.39485	0.53317	0.63949
	4	5	3.927	0.00200	0.03154	0.16512	0.31441	0.45222	0.56520
	4	5	4.712	0.00077	0.01645	0.09793	0.21434	0.33887	0.45228

producer's risk, but this scheme also exerts pressure on the producer to improve the quality level of the product. At 4,712 hours,  $\sigma/\sigma_0=12$ ,  $p^*=0.75$  and the PA is 0.82513. The producer's risk for the sample first and double sampling are placed for  $p^*=0.75$  in Table 4. For  $\sigma/\sigma_0 = 2$  (the unknown average life is twice that of the specified average life), the producer's risk when time of experiment is 628 hours and 4,712 hours are 0.70724 and 0.95094 respectively. Thus, the

producer's risk decreases as the quality level of the product increases with  $p^*=0.75$ . (See Table 4 and Figure 1.)


Conclusion

This study established the acceptance sampling plans for various values of  $\sigma/\sigma_0$  and an experiment time assuming a life test follows the Marshall-Olkin extended Lomax distribution. This distribution provides a high probability for  $\sigma/\sigma_0 > 6$ .

Table 4: Producer's Risk with Respect to Time of Experiment for Double Sampling ( $p^*=0.75$ )

$\sigma/\sigma_0$	2	4	6	8	10	12
$(c_1 = 0, c_2 = 2, n_1 = 6, n_2 = 8, t/\sigma_0 = 0.628)$	0.70724	0.49895	0.13575	0.07221	0.04259	0.02711
$(c_1 = 0, c_2 = 2, n_1 = 2, n_2 = 3, t/\sigma_0 = 4.712)$	0.95094	0.83504	0.50939	0.34910	0.24381	0.17487

Figure1: OC Curve with  $p^*=0.95, t_0=628$  and  $p^*=0.99, t_0=4712$  for Single and Double Acceptance Sampling Plans (SSP & DSP).

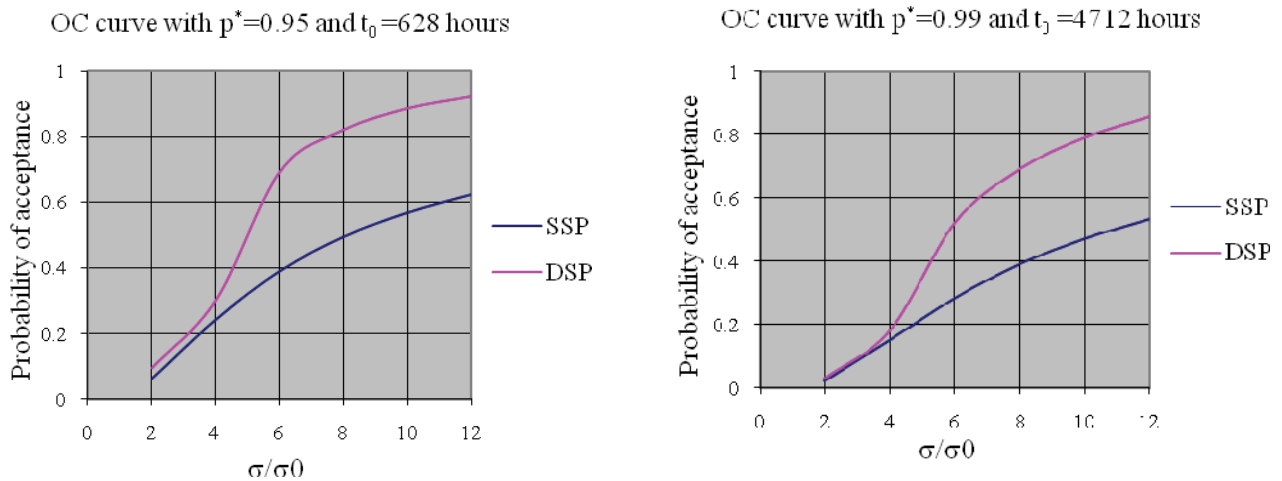

References

- Aslam, M. (2007). Double acceptance sampling based on truncated life tests in Rayleigh distribution. *European Journal of Scientific Research*, 17(4), 605-611.
- Aslam, M., & Kantam, R.R.L. (2008). Economic reliability acceptance sampling based on truncated life tests in the Birnbaum-Saunders distribution. *Pakistan Journal of Statistics*, 24(4), 269- 276.
- Baklizi, A. (2003). Acceptance sampling based on truncated life tests in the Pareto distribution of the second kind. *Advances and Applications in Statistics*, 3(1), 33-48.
- Baklizi, A., & El Masri, A.E.K. (2004). Acceptance sampling based on truncated life tests in the Birnbaum-Saunders model. *Risk Analysis*, 24(6), 1453.
- Balakrishnan, N., Leiva, V., & Lopez, J. (2007). Acceptance sampling plans from truncated life tests based on the generalized Birnbaum-Saunders distribution. *Communication in Statistics-Simulation and Computation*, 36, 643-656.
- Epstein, B. (1954). Truncated life tests in the exponential case. *Annals of Mathematical Statistics*, 25, 555-564.
- Ghitany, M. E., Al-Awadhi, F. A., & Al-khelfan, L. A. (2007). Marshal-Olkin extended Lomax distribution and its application to censored data. *Communications in Statistics Theory and Methods*, 36, 1855- 1866.
- Goode, H.P., & Kao, J.H.K (1961). *Sampling plans based on the Weibull distribution*. Proceeding of the Seventh National Symposium on Reliability and Quality Control, Philadelphia, PA, 24-40.
- Gupta, S. S. (1962). Life test sampling plans for normal and lognormal distribution. *Technometrics*, 4, 151- 175.
- Gupta, S. S., & Groll, P. A. (1961) Gamma distribution in acceptance sampling based on life tests. *Journal of the American Statistical Association*, 56, 942-970.
- Kantam, R.R. L., & Rosaiah, K. (1998). Half logistic distribution in acceptance sampling based on life tests. *IAPQR Transactions*, 23(2), 117-125.
- Kantam, R.R. L., Rosaiah, K., & Rao, G. S. (2001). Acceptance sampling based on life tests: Log-logistic models. *Journal of Applied Statistics*, 28(1), 121-128.
- Rao, G. S., Ghitany, M. E., & Kantam, R. R. L. (2008). Acceptance sampling plans for Marshall-Olkin extended Lomax distribution. *International Journal of Applied Mathematics*, 21(2), 315-325.
- Rao, G. S., Ghitany, M. E., & Kantam, R. R. L. (2009). Acceptance sampling plans for Marshall-Olkin extended Lomax distribution. *International Journal of Applied Mathematics*, 22(1), 139-148.
- Rosaiah, K., & Kantam, R.R.L. (2005). Acceptance sampling based on the inverse Rayleigh distribution. *Economic Quality Control*, 20(2), 277-286.
- Rosaiah, K., Kantam, R.R.L., & Santosh Kumar, C. (2006). Reliability of test plans for exponentiated log-logistic distribution. *Economic Quality Control*, 21(2), 165-175.
- Rosaiah, K., Kantam, R.R. L., & Pratapa Reddy, J. (2007). Economic reliability test plan with Inverse Rayleigh Variate. *Pakistan Journal of Statistics*, 24(1), 57- 65.
- Rosaiah, K., Kantam, R.R. L., & Santosh Kumar, C. (2007). Exponentiated log-logistic distribution - an economic reliability test plan. *Pakistan Journal of Statistics*, 23(2), 147-156.
- Sobel, M., & Tischendorf, J. A. (1959). Acceptance sampling with new life test objectives, Proceedings of Fifth National Symposium on Reliability and Quality Control, Philadelphia, PA, 108-118.
- Tsai, T.R., & Wu, S.J. (2006). Acceptance sampling based on truncated life tests for generalized Rayleigh distribution. *Journal of Applied Statistics*, 33(6), 595-600.